
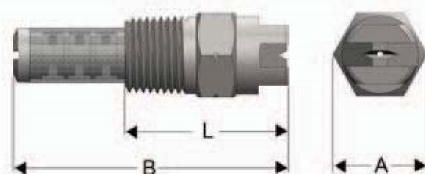


FV SERIES

Flat “V” spray nozzles

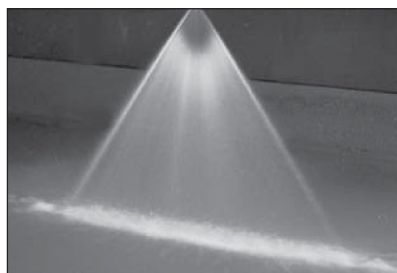

SPRAY CHARACTERISTICS:

FV-Series low flow rate spray nozzles produce a flat, fan-shaped spray pattern, with spray angles available from 0° to 110°. Spray density tapers off toward the outside of these sprays, to permit overlapping of spray patterns while maintaining uniform spray density.

CONSTRUCTION:

The models listed are machined from bar stock and are one piece construction. Standard materials are brass, 303 stainless steel and 316 stainless steel. Other materials may be available upon request. All parts are made with a female thread on the inlet to install BEX® strainers.

TYPICAL APPLICATIONS:

- Metal Washing
- Foam Control
- Wetting
- Vehicle Washing
- Fertilizer Spraying
- Food Processing

PIPE SIZE (NPT)	Length L (inches)	Dim. A (inches)	Internal Thread	Dim. B (with strainer assy) (inches)
1/8	13/16	7/16 HEX	1/4-32 UNEF	1.34
1/4	15/16	9/16 HEX	3/8-24 UNF	1.68

Mesh sizes available are 50, 100, and 200.



Available with strainer assembly.

Model	Equiv. Orifice Diameter (in)	CAPACITY AT VARIOUS PRESSURES (USGPM)											SPRAY ANGLE @ (degrees)			
		5 psi	10 psi	20 psi	30 psi	40 psi	60 psi	80 psi	100 psi	200 psi	300 psi	500 psi	20 psi	40 psi	80 psi	200 psi
1/8FV11001	0.025	0.04	0.05	0.07	0.09	0.10	0.12	0.14	0.16	0.22	0.27	0.35	94	110	118	119
1/4FV11001	0.025	0.04	0.05	0.07	0.09	0.10	0.12	0.14	0.16	0.22	0.27	0.35	94	110	118	119
1/8FV110015	0.030	0.05	0.08	0.11	0.13	0.15	0.18	0.21	0.24	0.34	0.41	0.53	94	110	118	119
1/4FV110015	0.030	0.05	0.08	0.11	0.13	0.15	0.18	0.21	0.24	0.34	0.41	0.53	94	110	118	119
1/8FV11002	0.035	0.07	0.10	0.14	0.17	0.20	0.25	0.28	0.32	0.45	0.55	0.71	96	110	118	120
1/4FV11002	0.035	0.07	0.10	0.14	0.17	0.20	0.25	0.28	0.32	0.45	0.55	0.71	96	110	119	120
1/8FV11003	0.043	0.11	0.15	0.21	0.26	0.30	0.37	0.42	0.47	0.67	0.82	1.06	96	110	118	120
1/4FV11003	0.043	0.11	0.15	0.21	0.26	0.30	0.37	0.42	0.47	0.67	0.82	1.06	96	110	118	120
1/8FV11004	0.050	0.14	0.20	0.28	0.35	0.40	0.49	0.57	0.63	0.89	1.10	1.41	90	110	112	114
1/4FV11004	0.050	0.14	0.20	0.28	0.35	0.40	0.49	0.57	0.63	0.89	1.10	1.41	90	110	112	114
1/8FV11005	0.056	0.18	0.25	0.35	0.43	0.50	0.61	0.71	0.79	1.12	1.37	1.77	96	110	114	118
1/4FV11005	0.056	0.18	0.25	0.35	0.43	0.50	0.61	0.71	0.79	1.12	1.37	1.77	96	110	114	118
1/8FV11006	0.061	0.21	0.30	0.42	0.52	0.60	0.73	0.85	0.95	1.34	1.64	2.12	97	110	115	120
1/4FV11006	0.061	0.21	0.30	0.42	0.52	0.60	0.73	0.85	0.95	1.34	1.64	2.12	97	110	115	120
1/8FV11008	0.071	0.28	0.40	0.57	0.69	0.80	0.98	1.13	1.26	1.79	2.19	2.83	100	110	115	120
1/4FV11008	0.071	0.28	0.40	0.57	0.69	0.80	0.98	1.13	1.26	1.79	2.19	2.83	100	110	115	120
1/8FV9501	0.025	0.04	0.05	0.07	0.09	0.10	0.12	0.14	0.16	0.22	0.27	0.35	82	95	104	112
1/4FV9501	0.025	0.04	0.05	0.07	0.09	0.10	0.12	0.14	0.16	0.22	0.27	0.35	82	95	104	112
1/8FV95015	0.030	0.05	0.08	0.11	0.13	0.15	0.18	0.21	0.24	0.34	0.41	0.53	82	95	104	112
1/4FV95015	0.030	0.05	0.08	0.11	0.13	0.15	0.18	0.21	0.24	0.34	0.41	0.53	82	95	104	112
1/8FV9502	0.035	0.07	0.10	0.14	0.17	0.20	0.25	0.28	0.32	0.45	0.55	0.71	82	95	103	112
1/4FV9502	0.035	0.07	0.10	0.14	0.17	0.20	0.25	0.28	0.32	0.45	0.55	0.71	82	95	103	112
1/8FV9503	0.043	0.11	0.15	0.21	0.26	0.30	0.37	0.42	0.47	0.67	0.82	1.06	84	95	103	114
1/4FV9503	0.043	0.11	0.15	0.21	0.26	0.30	0.37	0.42	0.47	0.67	0.82	1.06	84	95	103	114
1/8FV9504	0.050	0.14	0.20	0.28	0.35	0.40	0.49	0.57	0.63	0.89	1.10	1.41	84	95	100	114

Model	Equiv. Orifice Diameter (in)	CAPACITY AT VARIOUS PRESSURES (USGPM)											SPRAY ANGLE @ (degrees)			
		5 psi	10 psi	20 psi	30 psi	40 psi	60 psi	80 psi	100 psi	200 psi	300 psi	500 psi	20 psi	40 psi	80 psi	200 psi
1/4FV9504	0.050	0.14	0.20	0.28	0.35	0.40	0.49	0.57	0.63	0.89	1.10	1.41	84	95	100	114
1/8FV9505	0.056	0.18	0.25	0.35	0.43	0.50	0.61	0.71	0.79	1.12	1.37	1.77	86	95	101	115
1/4FV9505	0.056	0.18	0.25	0.35	0.43	0.50	0.61	0.71	0.79	1.12	1.37	1.77	86	95	101	115
1/8FV9506	0.061	0.21	0.30	0.42	0.52	0.60	0.73	0.85	0.95	1.34	1.64	2.12	86	95	101	115
1/4FV9506	0.061	0.21	0.30	0.42	0.52	0.60	0.73	0.85	0.95	1.34	1.64	2.12	86	95	101	115
1/8FV95065	0.063	0.23	0.32	0.46	0.56	0.65	0.80	0.92	1.03	1.45	1.78	2.30	86	95	101	115
1/4FV95065	0.063	0.23	0.32	0.46	0.56	0.65	0.80	0.92	1.03	1.45	1.78	2.30	86	95	101	115
1/8FV9508	0.071	0.28	0.40	0.57	0.69	0.80	0.98	1.13	1.26	1.79	2.19	2.83	86	95	100	115
1/4FV9508	0.071	0.28	0.40	0.57	0.69	0.80	0.98	1.13	1.26	1.79	2.19	2.83	86	95	100	115
1/8FV8001	0.025	0.04	0.05	0.07	0.09	0.10	0.12	0.14	0.16	0.22	0.27	0.35	70	80	82	90
1/4FV8001	0.025	0.04	0.05	0.07	0.09	0.10	0.12	0.14	0.16	0.22	0.27	0.35	70	80	82	90
1/8FV80015	0.030	0.05	0.08	0.11	0.13	0.15	0.18	0.21	0.24	0.34	0.41	0.53	70	80	82	90
1/4FV80015	0.030	0.05	0.08	0.11	0.13	0.15	0.18	0.21	0.24	0.34	0.41	0.53	70	80	82	90
1/8FV8002	0.035	0.07	0.10	0.14	0.17	0.20	0.25	0.28	0.32	0.45	0.55	0.71	71	80	82	92
1/4FV8002	0.035	0.07	0.10	0.14	0.17	0.20	0.25	0.28	0.32	0.45	0.55	0.71	71	80	82	92
1/8FV8003	0.043	0.11	0.15	0.21	0.26	0.30	0.37	0.42	0.47	0.67	0.82	1.06	72	80	82	92
1/4FV8003	0.043	0.11	0.15	0.21	0.26	0.30	0.37	0.42	0.47	0.67	0.82	1.06	72	80	82	92
1/8FV8005	0.056	0.18	0.25	0.35	0.43	0.50	0.61	0.71	0.79	1.12	1.37	1.77	74	80	83	95
1/4FV8005	0.056	0.18	0.25	0.35	0.43	0.50	0.61	0.71	0.79	1.12	1.37	1.77	74	80	83	95
1/8FV8006	0.061	0.21	0.30	0.42	0.52	0.60	0.73	0.85	0.95	1.34	1.64	2.12	74	80	83	95
1/4FV8006	0.061	0.21	0.30	0.42	0.52	0.60	0.73	0.85	0.95	1.34	1.64	2.12	74	80	83	95
1/8FV8008	0.071	0.28	0.40	0.57	0.69	0.80	0.98	1.13	1.26	1.79	2.19	2.83	75	80	83	96
1/4FV8008	0.071	0.28	0.40	0.57	0.69	0.80	0.98	1.13	1.26	1.79	2.19	2.83	75	80	83	96
1/8FV6501	0.025	0.04	0.05	0.07	0.09	0.10	0.12	0.14	0.16	0.22	0.27	0.35	48	65	73	78
1/4FV6501	0.025	0.04	0.05	0.07	0.09	0.10	0.12	0.14	0.16	0.22	0.27	0.35	48	65	73	78
1/8FV65015	0.030	0.05	0.08	0.11	0.13	0.15	0.18	0.21	0.24	0.34	0.41	0.53	48	65	73	78
1/4FV65015	0.030	0.05	0.08	0.11	0.13	0.15	0.18	0.21	0.24	0.34	0.41	0.53	48	65	73	78
1/8FV6502	0.035	0.07	0.10	0.14	0.17	0.20	0.25	0.28	0.32	0.45	0.55	0.71	48	65	73	79
1/4FV6502	0.035	0.07	0.10	0.14	0.17	0.20	0.25	0.28	0.32	0.45	0.55	0.71	48	65	73	79
1/8FV65025	0.039	0.09	0.13	0.18	0.22	0.25	0.31	0.35	0.40	0.56	0.68	0.88	48	65	73	79
1/4FV65025	0.039	0.09	0.13	0.18	0.22	0.25	0.31	0.35	0.40	0.56	0.68	0.88	48	65	73	79
1/8FV6503	0.043	0.11	0.15	0.21	0.26	0.30	0.37	0.42	0.47	0.67	0.82	1.06	50	65	70	78
1/4FV6503	0.043	0.11	0.15	0.21	0.26	0.30	0.37	0.42	0.47	0.67	0.82	1.06	50	65	70	78
1/8FV6504	0.050	0.14	0.20	0.28	0.35	0.40	0.49	0.57	0.63	0.89	1.10	1.41	50	65	78	80
1/4FV6504	0.050	0.14	0.20	0.28	0.35	0.40	0.49	0.57	0.63	0.89	1.10	1.41	50	65	78	80
1/8FV6505	0.056	0.18	0.25	0.35	0.43	0.50	0.61	0.71	0.79	1.12	1.37	1.77	53	65	72	81
1/4FV6505	0.056	0.18	0.25	0.35	0.43	0.50	0.61	0.71	0.79	1.12	1.37	1.77	53	65	72	81
1/8FV6506	0.061	0.21	0.30	0.42	0.52	0.60	0.73	0.85	0.95	1.34	1.64	2.12	54	65	72	81
1/4FV6506	0.061	0.21	0.30	0.42	0.52	0.60	0.73	0.85	0.95	1.34	1.64	2.12	54	65	72	81
1/8FV6508	0.071	0.28	0.40	0.57	0.69	0.80	0.98	1.13	1.26	1.79	2.19	2.83	55	65	71	82
1/4FV6508	0.071	0.28	0.40	0.57	0.69	0.80	0.98	1.13	1.26	1.79	2.19	2.83	55	65	71	82
1/8FV5001	0.025	0.04	0.05	0.07	0.09	0.10	0.12	0.14	0.16	0.22	0.27	0.35	40	50	53	63
1/4FV5001	0.025	0.04	0.05	0.07	0.09	0.10	0.12	0.14	0.16	0.22	0.27	0.35	40	50	53	63
1/8FV5002	0.035	0.07	0.10	0.14	0.17	0.20	0.25	0.28	0.32	0.45	0.55	0.71	40	50	53	61
1/4FV5002	0.035	0.07	0.10	0.14	0.17	0.20	0.25	0.28	0.32	0.45	0.55	0.71	40	50	53	61
1/8FV5003	0.043	0.11	0.15	0.21	0.26	0.30	0.37	0.42	0.47	0.67	0.82	1.06	42	50	54	62
1/4FV5003	0.043	0.11	0.15	0.21	0.26	0.30	0.37	0.42	0.47	0.67	0.82	1.06	42	50	54	62
1/8FV5004	0.050	0.14	0.20	0.28	0.35	0.40	0.49	0.57	0.63	0.89	1.10	1.41	43	50	54	62
1/4FV5004	0.050	0.14	0.20	0.28	0.35	0.40	0.49	0.57	0.63	0.89	1.10	1.41	43	50	54	62
1/8FV5005	0.056	0.18	0.25	0.35	0.43	0.50	0.61	0.71	0.79	1.12	1.37	1.77	44	50	56	60
1/4FV5005	0.056	0.18	0.25	0.35	0.43	0.50	0.61	0.71	0.79	1.12	1.37	1.77	44	50	56	60
1/8FV5006	0.061	0.21	0.30	0.42	0.52	0.60	0.73	0.85	0.95	1.34	1.64	2.12	45	50	56	60
1/4FV5006	0.061	0.21	0.30	0.42	0.52	0.60	0.73	0.85	0.95	1.34	1.64	2.12	45	50	56	60
1/8FV5008	0.071	0.28	0.40	0.57	0.69	0.80	0.98	1.13	1.26	1.79	2.19	2.83	45	50	56	60
1/4FV5008	0.071	0.28	0.40	0.57	0.69	0.80	0.98	1.13	1.26	1.79	2.19	2.83	45	50	56	60

CONTINUED on next page...